


Pro 1100

SKU: 460147F • 461147F

FEATURES

- Boosts 4G LTE and 3G cellular signal in buildings up to 35,000 sq. ft.
- IC-approved and works with all major Canadian mobile carrier networks.
- Maximum uplink power of 25 dBm, downlink power up to 15 dBm.
- Built-in XDR technology to prevent overload/shutdown from signal.
- Onboard software to auto adjust gain to current signal environment.
- Color LCD touch screen for greater control and usability of Pro1100.
- Modern, intuitive amplifier design for ease of wall-mount installation.
- Choice of 50 Ohm “N” or 75 Ohm “f” connectors per cable preference.

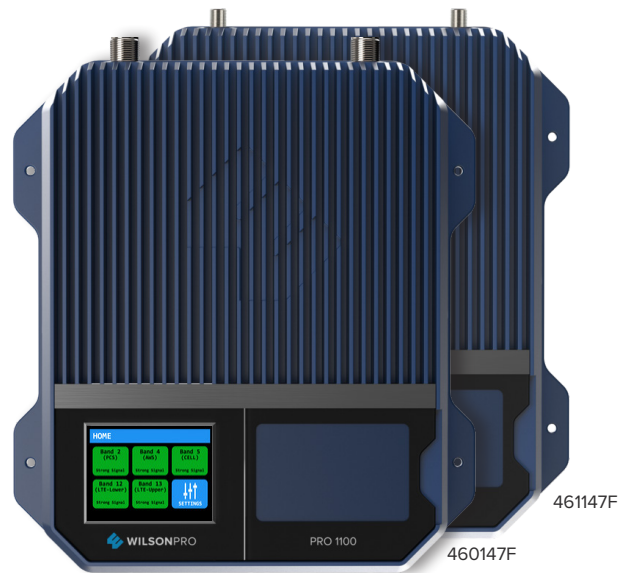

Kit Includes

460147 50 Ohm Kit	Pro 1100 Booster	Outside Directional Antenna 314411	Inside Dome Antenna 304412	Lightning Surge Protector 859902	2ft Low-Loss Wilson400 Cable 952302	60ft Low-Loss Wilson400 Cable 952360	75ft Low-Loss Wilson400 Cable 952375
461147 75 Ohm Kit	Pro 1100 Booster	Outside Directional Antenna 314475	Inside Dome Antenna 304419	Lightning Surge Protector 859992	2ft Low-Loss RG11 Cable 951127	50ft Low-Loss RG11 Cable 951150	75ft Low-Loss RG11 Cable 951175

About

The **WilsonPro 1100** is part of the next generation professional-grade cell signal amplification technology for Wilson Electronics. The natural successor to our Pro 1000, the Pro 1100 is a surprisingly powerful cell phone signal amplifier—capable of transmitting a 4dB stronger cellular signal back to the tower for always reliable cellular connectivity. This is twice the power of our competition. This added capacity makes the Pro1100 ideal for large homes, medical offices, commercial buildings, and retail spaces up to 35,000 square feet in coverage area.

Designed to reach far away cell towers, the Wilson Pro1100’s maximum uplink power surpasses the Pro1000’s by providing 25dBm of available output. The Pro 1100 features a modern, intuitive design for easier antenna connection—placing each indoor and outdoor antenna port on top of the amplifier itself. The exposed mounting flange found on the amplifier unit’s corners make for simple and clean wall-mount installation.

Specifications

MODEL NUMBER	460147F / 461147F	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohms / 75 Ohms	
POWER	110 - 240 V AC, 50 - 60 Hz, 30 W	
CONNECTORS	N-Female / F-Female	
BOOSTER DIMENSIONS	9 x 10 x 2 in	
BOOSTER WEIGHT	6.28 lbs / 6.22 lbs	


Detailed Specifications

Pro 1100					
SKU	460147F / 461147F				
Model Number	460047 / 461047				
IC ID	4726A-460047				
Connectors	N-Female / F-Female				
Antenna Impedance	50 Ohms / 75 Ohms				
Frequency	698-716 MHz, 729-746 MHz, 777-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
	24.0	24.0	25.0	25.0	25.0
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
	15.1	15.1	15.3	15.2	15.2
Noise Figure	5 dB nominal				
Isolation	> 90 dB				
Power Requirements	120V AC 0.5A				

The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Package Dimensions

19 L x 13 H x 13 W

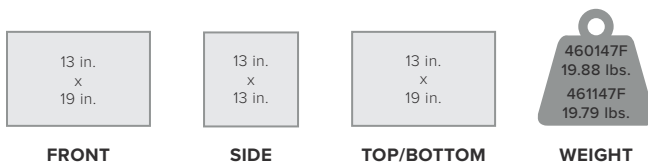

Support



3 Year Warranty from Purchase

Website: www.wilsonpro.com/support

Phone: +1 866 294 1660
Monday to Saturday

FOR PARTNER'S USE

UPC

PRO 1100 - 460147F
N-CONNECTOR



PRO 1100 - 461147F
F-CONNECTOR

